

# HYUNDAI

## UHD IP IR Bullet LPR Camera



# 5MP UHD IP IR Bullet LPR Camera

Model: HY-LPR5IR60-VF




### Features:

- 1/2.9" Sony IMX326 CMOS sensor
- Full HD resolution 2592 x 1944P
- Ultra low illumination 0.05Lux
- Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- D-WDR, Motion Detection, Privacy Mask, Mirror, rotate
- RTSP and Onvif 2.6 compatible
- H.265/H.264 dual-stream media server
- Easy-to-use P2P Cloud service
- Multiply web browser, PC Client, mobile APP remote access
- Optional customization Lens/POE, etc.
- Lightning protection 4000V
- Strong water-proof housing, IP66
- IR distance 50-60 meters
- HD 2.8-12mm VF Lens


2MP




5MP



LPR : OFF




LPR : ON



### Specification:

<b>Model</b>	<b>HY-LPR5IR60-VF</b>
<b>Camera</b>	
Image Sensor	1/2.9" 6.82MP IMX326 CMOS
Effective Pixels	3096(H)×2196 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.05Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror, Rotate
<b>Encode</b>	
Embedded Solution	Hi3516D
Video Standard	H.264/H.265
Video Resolution	MainStream: 18fps@5MP(2592x1944),25fps@4MP(2592x1520),30fps@3MP/1080 P/720P Sub stream: VGA/360P@30fps, etc.
Video Bitrates	32Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
<b>IR Led</b>	
IR Led	4pcs Big Array IR Leds
IR Distance	50-60m
<b>Lens</b>	
Focal length	2.8-12mm
<b>Network Services</b>	
Protocol	HTTP/RTSP/FTP/NFS/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	2.6 compatible
<b>General</b>	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

### Deminsion:

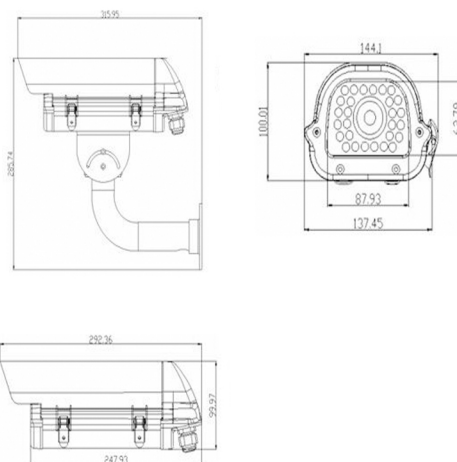

Ultra High-Defintion



Smart Infra-RED



ONVIF 2.5



DWDR



Mobile View



3D-DNR



POE