


HYUNDAI

4 CH DVR

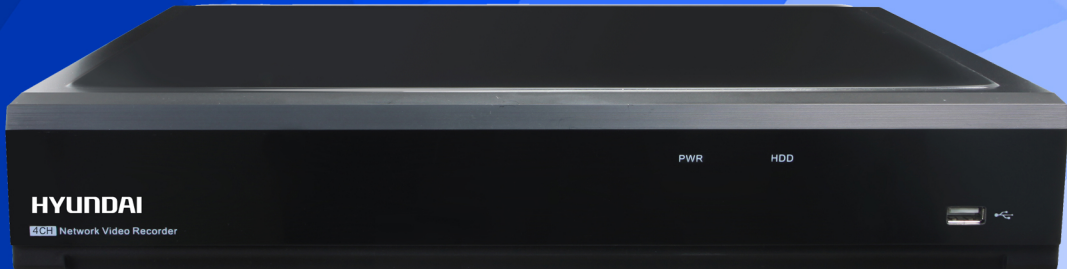

Model: HY-VX4H6

- 5 IN 1 4ch DVR: Each channel supports AHD/CVI/TVI/Analog/IP Video input
- HDMI / VGA simultaneous output upto 5MP
- H.265/H.264 dual-stream video compression
- All channel 5MP-Lite (12fps) recording
- 4 channel synchronous playback
- Support 4/1 Audio in/out, 4/1 Alarm in / out,
- Support 1 SATA HDD up to 6TB, 2 USB2.0
- Easy-to-use P2P Cloud monitoring: Web Brower, CMS, Mobile APP

Specification:

Model NO.		HY-VX4H6
Video Compression		H.265/H.264
Video System		NTSC/PAL
Operation System		Linux(embedded)
Analog video-input /output		4CH inputs / VGA and HDMI output
IP Video Input		2ch,(only IP up to 6ch)
Composite Video Input		up to 6ch (Analog video + IP video)
Audio input /output		4CH inputs /1CH output(RCA)
Display	resolution	Analog : 5MP-Lite:20fps 4MP-Lite:30 fps 3MP:18fps 1080P/720P/960H:30fps IP : 5MP/4MP/3MP1080P/720P
	feature	1/4/6/S.E.Q.
Record	resolution	Analog : 5MP-Lite/4MP-Lite/3MP/1080P/720P/960H IP : 5MP/4MP/3MP1080P/720P
	speed	Analog : 5MP-Lite:12fps (each ch) 4MP-Lite:14fps(each ch)- 3MP:9fps(each ch) 1080P:13fps(each ch) 720P:PAL:25fps(each ch)/NTSC::30fps(each ch) IP : PAL:25fps(each ch)/NTSC: 30fps(each ch)
IP-Recording Bandwidth (Maximum input Bandwidth)		8Mbps ~24Mbps(default is 8Mbps, decrease one Analog channel can increase 4Mbps)
Maximum output Brandwidth		32Mbps
Maximum decode performance		1080P:52fps
Recording Mode		Continuous/Manual/Motion detect
Synchronous Playback		4CH
Network Type		Lan, DHCP, and DDNS
HDD interface		1SATA HDD, up to 6TB
Multiplex Operation		live display, record, playback, backup and network
USB		2xUSB(for mouse and backup/upgrade)
Sensor & Alarm I/O		4CH inputs /1CH output
PTZ Control		yes (RS485)
Mobile Surveillance		Support Mobile Phones based on iPhone and Android operation system
VGA/HDMI		1024*768,1280*720,1280*1024,1440*900,1920*1080(1080P),2560*1440(2K),3840*2160(4K)
Power Supply		DC 12V/2A
Dimension(WxDxH)		300X227X53mm
Working Temperature		-10°C~+55°C
Working Humidity		10%~90%